

Ultrasonic Anemometer Lufft 2D Compact - V200A-UMB

Extremely precise and maintenance-free measurement of wind velocity and wind direction as well as calculation of acoustic virtual temperature.



Description

- Robust design and precise measurement of wind speed, wind direction, air pressure and calculation of acoustic virtual temperature
- Maintenance-free - no mechanical parts
- Ideal for renewable energy applications
- Heating for use in cold weather climates

Extremely precise and maintenance-free measurement of wind velocity and wind direction as well as calculation of acoustic virtual temperature. The ultrasonic wind sensor is seawater-resistant and designed without mechanical parts as they have been used with traditional “cups and vanes”. The sensor is heated to remove frost and ice formation from the sensor.

The digital or analog output delivers instantaneous, average, min or max value with flexible measuring rate. We recommend using the Modbus RTU protocol for applications with Ammonit Meteo-40 data loggers.

Wind speed and direction

The wind measurement element uses 4 ultrasound sensors which take cyclical measurements in all directions. The resulting wind speed and direction are calculated from the measured run-time sound differential.

Virtual temperature

Due to the physical relationship between the velocity of propagation of sound and the air temperature, the approximate ambient temperature can be determined with the aid of ultrasound sensors.

Air pressure


The air pressure is measured by an integrated air pressure sensor.

Specifications

Wind Speed			
Measuring range	0 ... 90 m/s		
Accuracy	± 0.3 m/s or 3 % (0 ... 35 m/s) RMS, ± 5 % (>35 m/s) RMS		
Resolution	0.1 m/s		
Wind Direction			
Measuring range	0 ... 359.9 °		
Accuracy	< 3 ° RMSE > 1.0 m/s		
Resolution	0.1°		
Air Pressure			
Principle	MEMS capacitive		
Measuring range	300 ... 1200 hPa		
Accuracy	± 1.5 hPa (0...40 °C)		
Resolution	0.1 hPa		
Virtual Temperature			
Measuring range	-50 ... 70 °C		
Accuracy	± 2.0 K (without heater and without solar irradiation or wind speed > 4 m/s)		
Resolution	0.1 °K		
Data Output Digital			
Interface	RS485 Half-/Full-duplex, isolated		
Baud rate	1200 ... 57600		
Meas. rate instant. value	1 ... 10 s		
Meas. Avg (arith., vec.), Min, Max	1...10 min		
Status identification	Heating, sensor failure		
Data Output Analog			
Data output analog	Half-duplex mode		
Output signal	0 ... 20 mA, 4 ... 20 mA, 0 ... 10 V, 2 ... 10 V, 2 ... 2,000 Hz (instantaneous, avg, min, max)		
Load	Max. 300 Ω		
Resolution	16 bit		
General			
Bus operation	Up to 32 devices		
Operating voltage	Power supply electronics: Power supply electronics + heating:	12 ... 24 VDC ±10% 12 ... 24 VDC ±10%	50 mA 900 mA
Electrical connection	8-pole plug		
Ambient temperature	-40 ... 60 °C (with heating) / -20 ... 60 °C (without heating)		
Dimensions and weight	Ø approx. 150 mm, height approx. 170 mm / approx. 0.8 kg		

Wind Speed	
Protection type	IP66
Manufacturer	G. Lufft Mess- und Regeltechnik GmbH

Sensor connection diagram

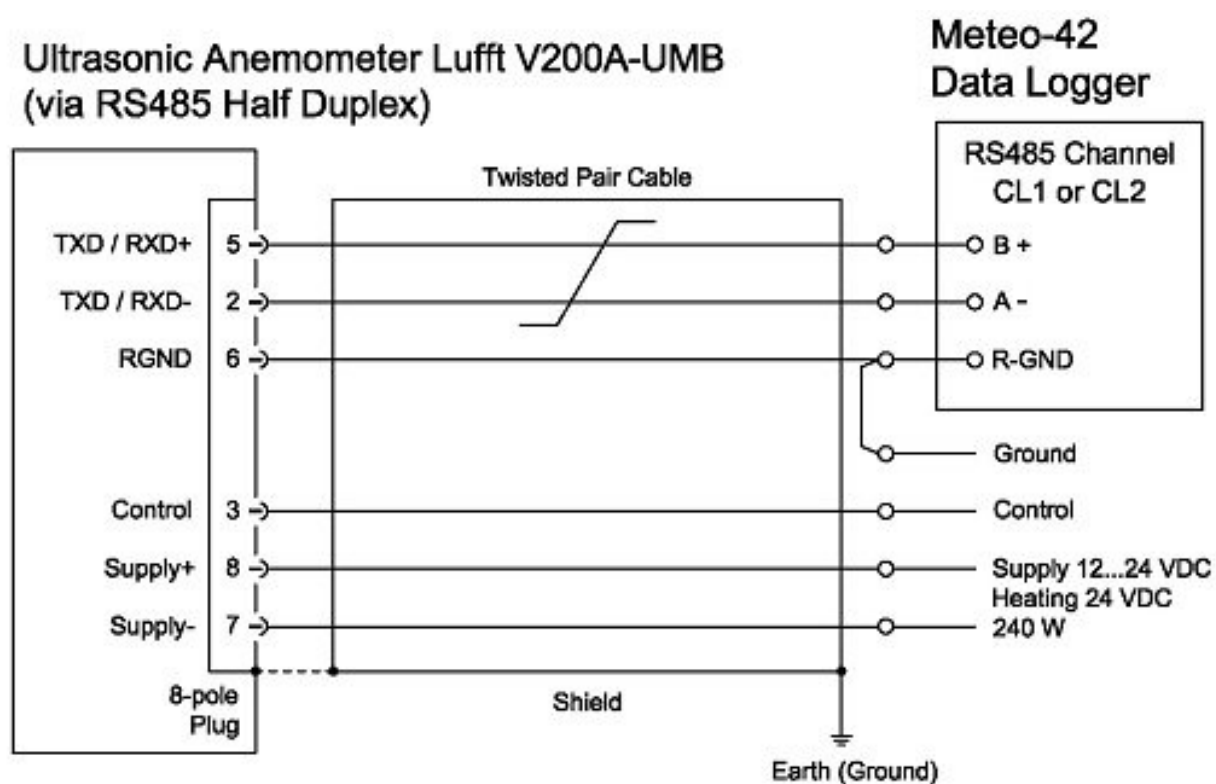

Ultrasonic Anemometer Lufft 2D

V200A-UMB

Communication RS485 Half Duplex

M83575

Module
M83570

Repeater
M84100

Meteo-40 Data Logger

Input Channel
RS485

