


- Monocrystalline solar module for Ammonit stand-alone power supply systems
- Scratch resistant anodised aluminium with a twin wall frame
- Crystalline cells sandwiched between tempered low iron solar glass sheets and double layered highly resistant foil



Characteristic	Description / Value
Peak Power (Pmax)	100 W
Maximum power voltage	(Vmp) 17.6 V
Maximum power current	(Imp) 5.68 A
Short circuit current	(Isc) 6.14 A
Open circuit voltage	(Voc) 21.6 V
Operating module temperature	-40 ... +85 °C
Weight	8.2 kg
Dimensions (X / Y / Z)	1200 / 540 / 35 mm
Mounting hole pitch (x1 / y / x2)	600 / 500 / - mm
Mounting hole (Ø, d1)	9 x 14 mm

### Schematic

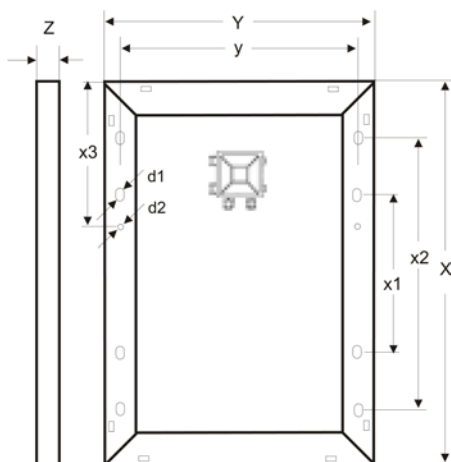

Wire Colours	
red	+
blue	-

Attention: Drill holes may vary depending on production serie.

Modification Date: 17 July 2019